



Heat pump range

idealenergy.ie

DISTRIBUTED BY
IDEAL
ENERGY

Decarbonisation of domestic heating

Decarbonisation and the drive towards Net Zero by 2050 is fast becoming a reality, with the government committing to a national target of Net Zero carbon emissions by 2050. This means the way we provide heating and hot water to homes will fundamentally change over the coming years.

Our heat pumps are designed to work in new build and retrofit installations, working with traditional radiators and underfloor heating.

Contents

- 4 Introduction
- 5 The Ideal heat pump ecosystem
- 6 Logic Air heat pump
- 10 Logical solutions
- 12 Logic Air heat pump
- 16 The technology
- 17 COP & SCOP
- 18 Logic Air pre-plumbed cylinder
- 28 Logic Air control box
- 30 Accessories list
- 32 Halo Air
- 41 Halo Lite RF
- 42 Product codes
- 44 Designed for new builds
- 45 Designed for home owners
- 46 Designed for installers
- 47 Benefits of working with Ideal
- 48 World-class support



Introduction, background and collaboration

Whilst we may be best known for gas boilers in IE, behind the scenes there is a wealth of expertise reaching across the globe supporting the **low carbon transformation** that is coming to the IE heating industry.

Our parent company, Groupe Atlantic, a family-owned global HVAC manufacturer, has a long history in heat pumps and currently holds a market leading position in France. Combining the Groupe Atlantic heat pump technical and manufacturing expertise with our knowledge of UK and IE heating systems and the UK and IE market provides a **winning formula for our range of monobloc heat pumps**.

In addition, we are also utilising cylinder expertise within the group from Gledhill who manufacture the **high quality, ultra-efficient heat pump cylinder** that complements our monobloc heat pumps.

Combining knowledge and skills from Groupe Atlantic, Ideal Heating and Gledhill, we have developed **a range of products that will make our customers lives easier**, just like the award-winning Logic boiler.


As well as the technical and manufacturing expertise, the **low carbon products** are supported by the industry leading customer support package that we are known for. From heating design support to technical assistance, over the phone or in person including end user advice, whether the product is a heat pump or a gas boiler, we will deliver the same outstanding customer service and support.



The Ideal heat pump ecosystem

The Ideal heat pump range brings our best low carbon products together. Designed to operate seamlessly, our industry leading heat pump, highly efficient hot water cylinder and Halo room thermostat provide all the components for a reliable and efficient heat pump system.

Supported by national customer service and engineer support. The Ideal heat pump range offers the complete low carbon package.

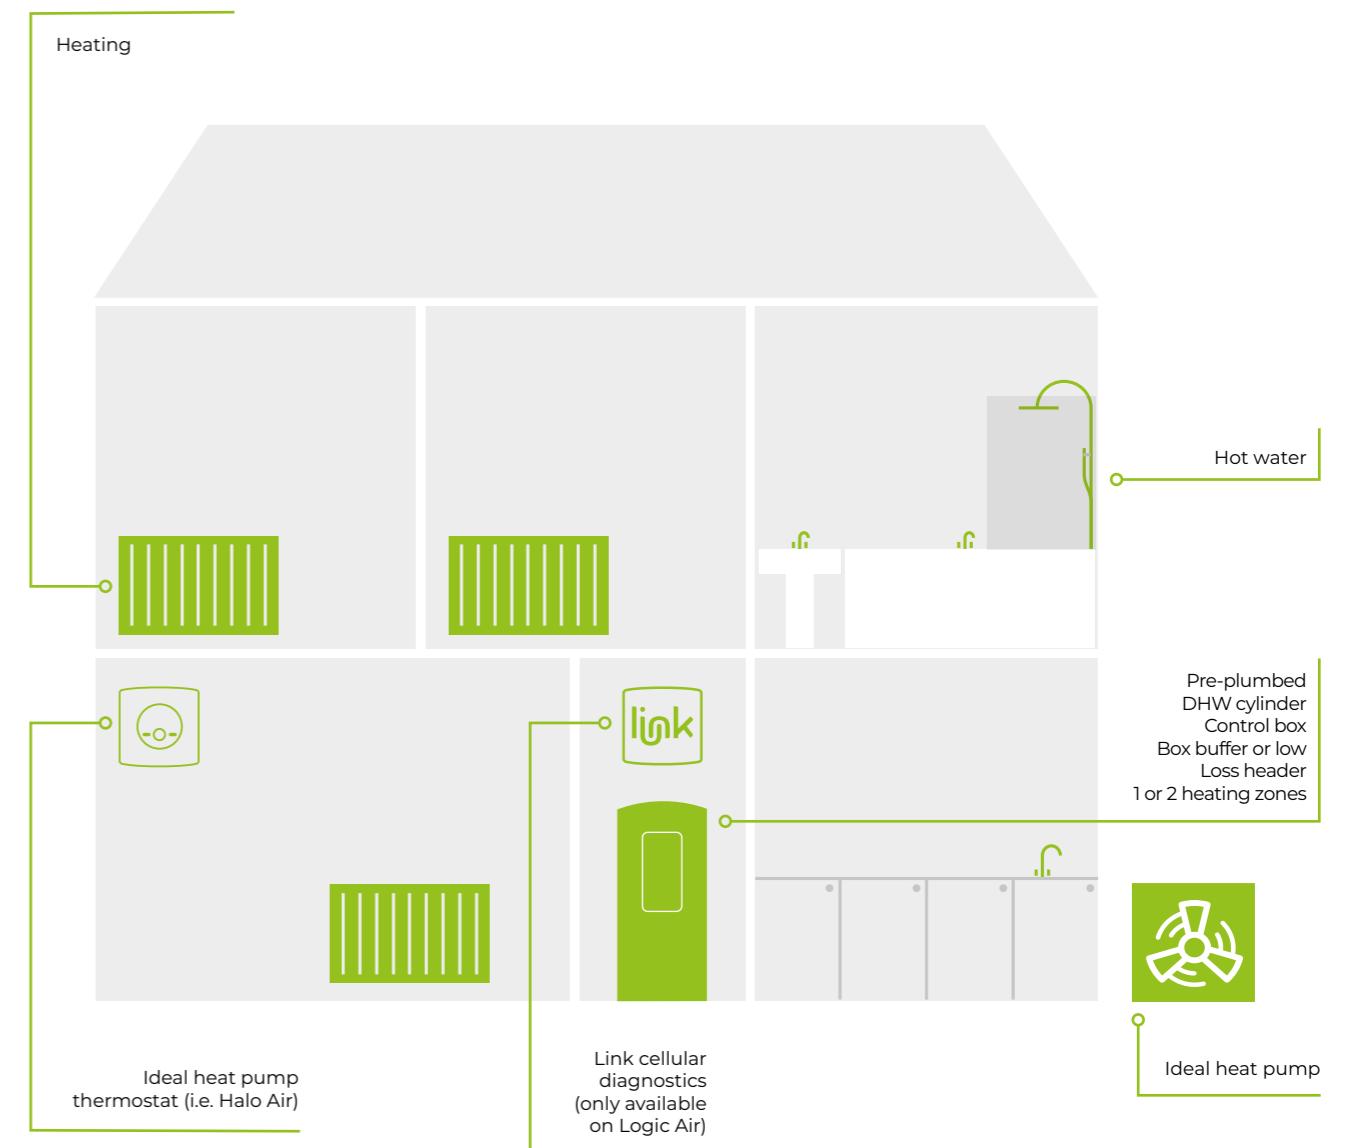

Logic Air heat pump



Designed for
the Irish climate

KEY FEATURES



Pre-plumbed and
pre-wired design



Compatible
with Halo Air



Highly efficient
SCOP rating
up to 519%*



Year-round
customer support



Low-carbon
R32 refrigerant



All Logic Air heat
pumps are Quiet
Mark certified



*Performance data in accordance with EN 14825, EN 12102-1, EN 14511. The energy efficiency provided may not correspond to the actual energy once installed in a building, as the efficiency is influenced by other factors such as heat loss in the distribution system and the capacity of the products in relation to building size and characteristics.

Logic Air specification





The Logic Air heat pump range is our range of monobloc heat pumps, offering great efficiencies both in heating and hot water. The Logic Air is designed to deliver efficient, simple and reliable low carbon heating in homes.

Taking the learnings from the award winning Logic boiler, the Logic Air heat pump integrates seamlessly with Irish homes, partnered with our best in class pre-plumbed hot water cylinder and our connected Halo Air room thermostat, the Logic Air is quick to install, easy to commission and simple to use.

Our heat pumps are supported by our industry leading customer service and warranty team which is based in Ireland and is open 5 days a week, providing year-round customer and technical support.

DIMENSIONS



	4kW & 5kW	8kW & 10kW
A	798	1008
B	518	518
C	1095	1095
D	512	499
E	521	518
F	558	558
G	688	688
H	516	516
I	80	80
J	184	184
K	140	140
L	95	95
M	84	84
N	48	48
O	90	90
P	103	105

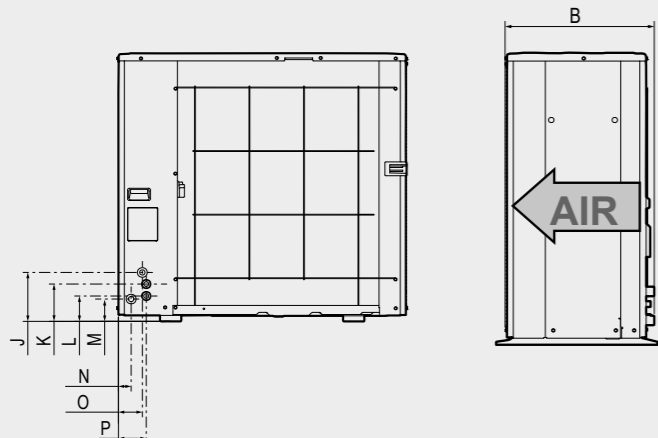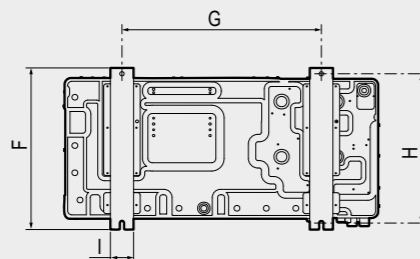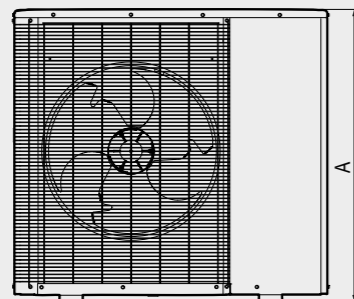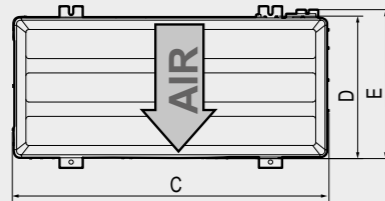

KEY FEATURES

- ✓ 5 year warranty
- ✓ Designed for the Irish climate
- ✓ Pre-plumbed and pre-wired design enables easy installation and servicing
- ✓ Highly efficient SCOP rating up to 519%
- ✓ Intuitive control: smart weather compensating controls
- ✓ Low-carbon R32 refrigerant
- ✓ Compatible with Halo Air
- ✓ Year-round customer support
- ✓ All Logic Air heat pumps are Quiet Mark certified

INTERNAL DIAGRAM

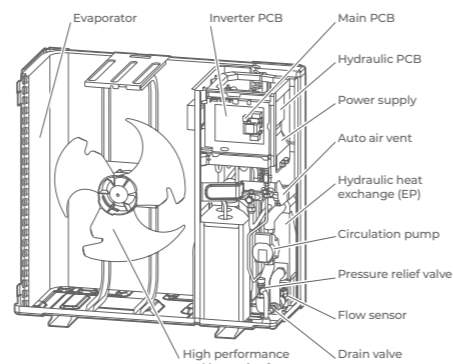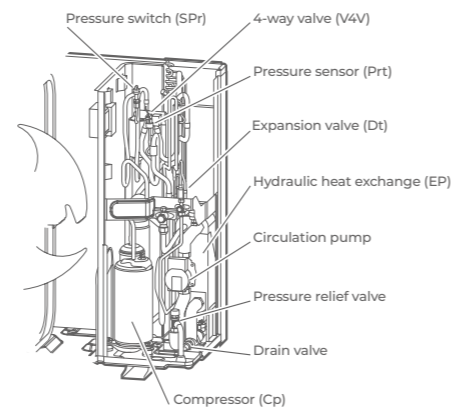

Logic Air specification

		Logic Air 4kW	Logic Air 5kW	Logic Air 8kW	Logic Air 10kW
Ideal Product Code		IE750664	IE750665	IE750666	IE750667
Heat Pump Space Heating [35°C]*	ErP rating	A+++	A+++	A+++	A+++
	ηs	195	200	203	205
	SCOP (EN14825)	4.96	5.07	5.16	5.19
Heat Pump Space Heating [55°C]*	ErP rating	A++	A++	A++	A++
	ηs	136	143	145	146
	SCOP (EN14825)	3.48	3.65	3.7	3.73
Heating [A 7°C / W 35°C]*	Capacity (kW)	4.0	5.0	8.2	10.3
	Power input (kW)	0.75	0.97	1.58	2.1
	COP	5.34	5.0	5.19	4.9
Heating [A 7°C / W 55°C]*	Capacity (kW)	4.0	5.0	8.2	10.3
	Power input (kW)	1.33	1.64	2.67	3.42
	COP	3.00	3.04	3.07	3.01
Sound Power Level (EN 12102 - 1)	35°C dB(A)	52	52	55	55
	55°C dB(A)	52	52	55	55
Pipework Connection Sizes	Heating F/R (mm)	28mm	28mm	28mm	28mm
Dimensions Outdoor Unit (mm)	Width	1095	1095	1095	1095
	Depth	518	518	518	518
	Height	798	798	1008	1008
Weight (kg)	Outdoor unit	86	86	110	110
Electrical Data	Electrical supply (50 Hz)	230v	230v	230v	230v
	Phase	Single Phase	Single Phase	Single Phase	Single Phase
Refrigerant Charge (kg)*	R32	0.88	0.88	1.47	1.47
Certification	EN 14511:2018, EN 14825:2016, EN 12102 - 1:2022				

*Performance data in accordance with EN 14825 : 2016, EN 12102-1 :2022, EN 14511 : 2018. The energy efficiency provided may not correspond to the actual energy once installed in a building, as the efficiency is influenced by other factors such as heat loss in the distribution system and the capacity of the products in relation to building size and characteristics.

Logical solutions



EFFICIENCY

The efficiency rating of a heat pump determines how much it costs to use. A high efficiency rating means it costs less to operate. The Logic Air has one of the highest efficiency ratings in Ireland, rated at 5.19 (Coefficient of performance) making it one of the most economical heat pumps on the market.




SOUND AND DIMENSIONS

Sound and dimensions are important, not just for our customers comfort level. The Logic Air is quiet and compact. Cutting edge acoustic technology makes its low sound levels amongst the best in the market.



FAST HEAT PUMP INSTALLATION

Our Logic Air heat pump, pre-plumbed cylinders and Halo Air room thermostat are designed to be amongst the fastest heat pumps to install. Factory fitted components, click and connect wiring terminals reduce installation time and improve installation reliability.



HOT WATER

Ensuring enough hot water can be generated efficiently and quickly is crucial to a heat pump system. The Logic Air pre-plumbed hot water cylinder can generate hot water faster than some of the most popular heat pump DHW cylinders in Ireland, saving money and energy.



SIMPLE TO USE, APP CONTROL AND ONLINE HEALTH CHECKS

Halo Air is a new generation of heat pump thermostats connected to your phone with options to connect to our customer service team. Halo Air automatically makes your heating system more efficient, enables remote control and 24/7 system performance data. All wrapped up in an easy to use controller.



SAFE AS STANDARD

R32 refrigerant has a flammability rating almost 85% lower than propane alternatives. With a '0' ozone depletion rating and a low global warming potential, R32 is safe efficient and reliable.



HP290 heat pump



Designed for
the Irish climate

KEY FEATURES



Pre-plumbed and
pre-wired design



Compatible with
Halo Lite RF



Highly efficient
SCOP rating
up to 500%*



Year-round
customer support



Low-carbon
R290 refrigerant



*Performance data in accordance with EN 14825 : 2016, EN 12102-1 : 2022, EN 14511 : 2018. The energy efficiency provided may not correspond to the actual energy once installed in a building, as the efficiency is influenced by other factors such as heat loss in the distribution system and the capacity of the products in relation to building size and characteristics.

HP290 specification




The HP290 monobloc heat pump offers a low-GWP refrigerant with high efficiencies.

The HP290 can provide efficient heating and hot water throughout the year by utilising our pre-plumbed and pre-wired cylinder. The system offers our users an aesthetically pleasing heating solution and when paired with Halo Lite RF, a great user experience.

Our heat pumps are supported by our industry leading customer service and warranty team which is based in Ireland and is open 5 days a week, providing year round customer and technical support.

DIMENSIONS

	4.5kW & 6kW	8kW - 14kW
A	717	865
B	1299	1385
C	426	523
D	375	456
E	121	192
F	644	656
G	379	363
H	71	68
I	161	145
J	91	100
K	91	129

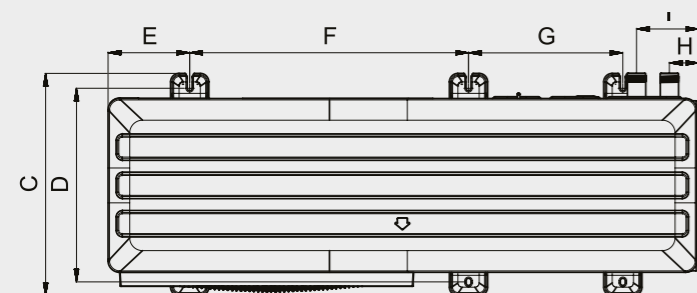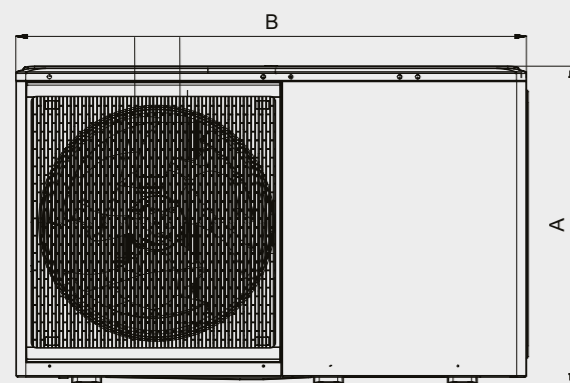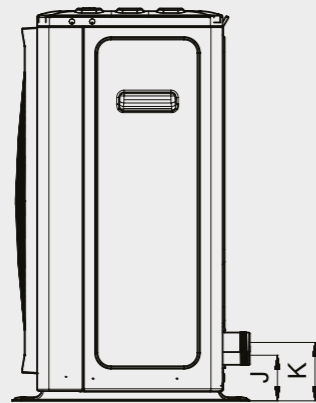

KEY FEATURES

- ✓ 5 year warranty
- ✓ Designed for the Irish climate
- ✓ Pre-plumbed and pre-wired design enables easy installation and servicing
- ✓ Highly efficient SCOP rating up to 500%
- ✓ Intuitive control: smart weather compensating controls
- ✓ Low-carbon R290 refrigerant
- ✓ Flow temperatures up to 75°C
- ✓ Compatible with radiator and unfloor heating systems
- ✓ Smart grid and solar PV compatible
- ✓ Domestic hot water: hot, efficient and fast re-heat times with the Ideal heat pump cylinder range
- ✓ Compatible with Halo Lite RF
- ✓ Year-round customer support


HP290 specification

		HP290 4.5kW	HP290 6kW	HP290 8kW	HP290 10kW	HP290 12kW	HP290 14kW
Ideal Product Code		241486	241487	241488	241489	241490	241491
Heat Pump Space Heating [35°C]*	ErP rating	A+++	A+++	A+++	A+++	A+++	A+++
	ηs	199	192	199	183	182	180
	SCOP (EN14825)	5.07	4.89	5.07	4.67	4.63	4.59
Heat Pump Space Heating [55°C]*	ErP rating	A++	A++	A++	A++	A++	A++
	ηs	148	149	149	141	141	139
	SCOP (EN14825)	3.79	3.82	3.82	3.62	3.61	3.57
Heating [A 7°C / W 35°C]*	Capacity (kW)	4.5	6.2	10	12	14	15
	Power input (kW)	0.87	1.27	2.13	2.5	3.11	3.41
	COP	5.15	4.9	4.7	4.8	4.5	4.4
Heating [A 7°C / W 55°C]*	Capacity (kW)	4.6	6.2	9.5	12	14	15
	Power input (kW)	1.44	2	3.12	3.87	4.67	5.26
	COP	3.2	3.1	3.05	3.1	3.0	2.85
Sound Power Level*	dB(A)	56	58	61	65	65	69
Pipework Connection Sizes	Heating F/R	1" BSP	1" BSP	1 1/4" BSP	1 1/4" BSP	1 1/4" BSP	1 1/4" BSP
Dimensions Outdoor Unit (mm)	Width	1299	1299	1385	1385	1385	1385
	Depth	426	426	523	523	523	523
	Height	717	717	865	865	865	865
Weight (kg)	Outdoor unit	90	90	117	135	135	135
Electrical Data	Electrical supply (50 Hz)	230v	230v	230v	230v	230v	230v
	Phase	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Refrigerant Charge (kg)*	R290	0.7	0.7	1.1	1.25	1.25	1.25
Certification	EN 14511:2018, EN 14825:2016, EN 12102 - 1:2022						

*Performance data in accordance with EN 14825 : 2016, EN 12102, EN 14511 : 2018. The energy efficiency provided may not correspond to the actual energy once installed in a building, as the efficiency is influenced by other factors such as heat loss in the distribution system and the capacity of the products in relation to building size and characteristics.

The technology

HEAT PUMP CYCLE

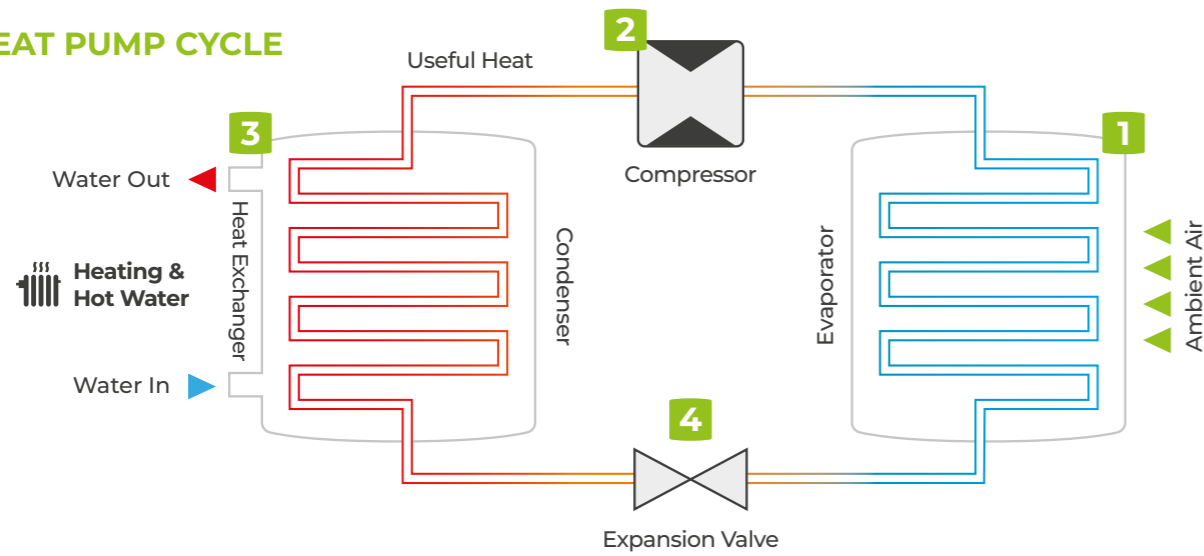

1. CAPTURE

The fan passes ambient air over extremely cold liquid refrigerant. The refrigerant captures the heat from the ambient air and becomes a warm vapour.

2. COMPRESS

The warm refrigerant vapour passes through a compressor which produces hot refrigerant and usable heat.


3. EXCHANGE

The heat in the hot refrigerant is then transferred to the heating and hot water cylinder through a heat exchanger.

4. EXPAND

Once the heat has been transferred to the house, the refrigerant passes through an expansion valve which reduces its temperature, making it really cold again and enabling it to capture heat from the ambient air, continuing the cycle.

Sound pressure and sound power

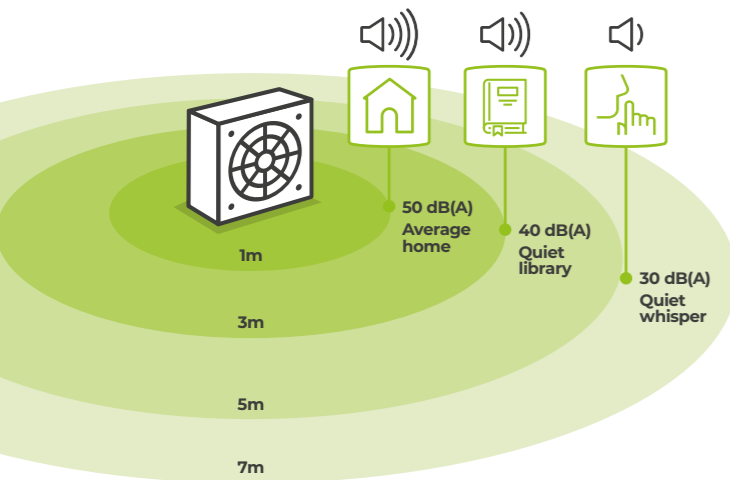

SOUND POWER

The way we calculate the sound a heat pump makes is by measuring the sound power and sound pressure. The sound power level is the sound that is emitted from the unit in laboratory conditions and is displayed on the ErP label.


SOUND PRESSURE

The sound noise level (sound pressure) measures the level of sound that you hear above the sound that already exists in the background. Sound pressure is lower than sound power.

QUIET MARK

The Logic Air range of heat pumps have all achieved Quiet Mark certification. Quiet mark is associated with the noise abatement society and technically assesses and certifies the quietest heat pumps in the heating industry.


COP & SCOP measures of efficiency

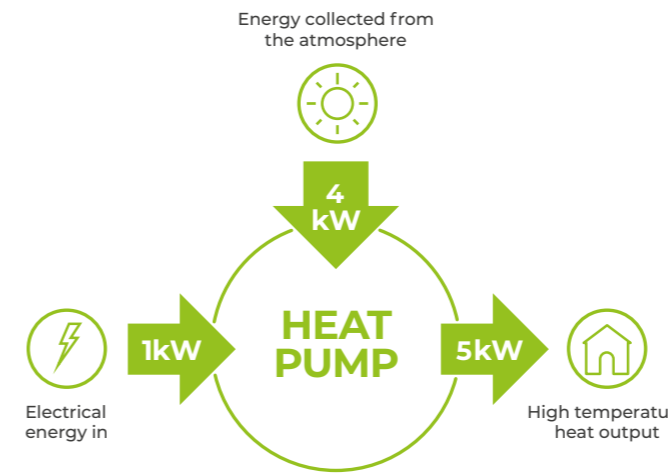

COP - COEFFICIENT OF PERFORMANCE

The coefficient of performance (COP) helps us measure the efficiency of a heat pump. The COP calculates the amount of heat energy a heat pump can create from each unit of electricity it uses.

$$COP = \frac{\text{HEAT OUTPUT}}{\text{ELECTRICAL INPUT}}$$

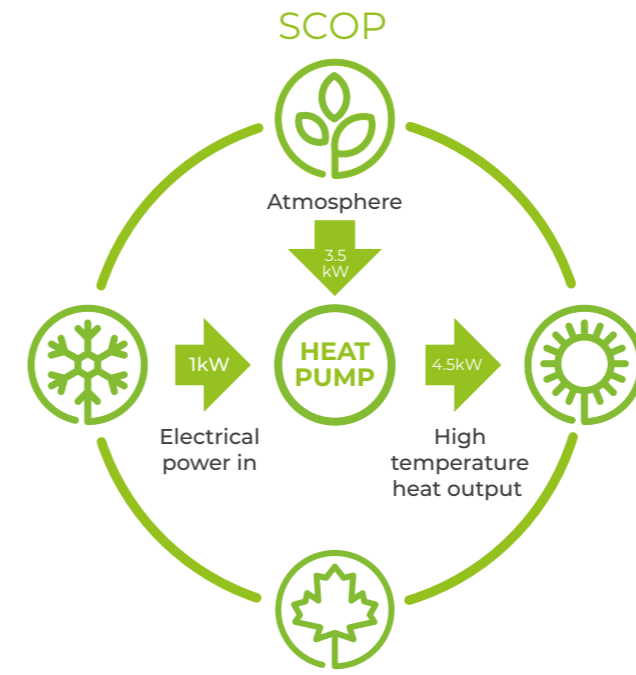

SCOP - SEASONAL COEFFICIENT OF PERFORMANCE

The seasonal coefficient of performance (SCOP) is the average COP carried over the annual heating season (the full year).

Heat pump pre-plumbed cylinder



KEY FEATURES



Logic Air and HP290 air source heat pumps



Built-in low loss header or buffer tank




150ltr – 300ltr options



Industry leading reheat times



Control box included



Fully pre-plumbed and pre-wired

Pre-plumbed cylinder specification

Our stainless steel pre-plumbed hot water cylinders combine efficiency with practicality. Designed and manufactured in the UK and boasting industry leading reheat times, our cylinders have been designed to store and generate hot water efficiently using a heat pump.

The pre-plumbed cylinders remove and reduce the complexity and cost of a traditional heat pump installation. Our cylinders are completely pre-plumbed in our UK factory, everything from the three-port valve to the filter are pre-fitted, saving time and space during installation. The cylinders are also pre-wired, from pipe sensors to the thermostatic cut-out, optimising installation and increasing reliability.

COMBINED DHW AND BUFFER CYLINDERS

The pre-plumbed cylinder range includes models with an integrated buffer. Housing the DHW cylinder and separate buffer tank in the same case, alongside pre-wired circulation pumps and all the standard pre-plumbing components.


LOW LOSS HEADER

Our pre-plumbed low loss header cylinders de-couple the heating system from the heat pump protecting flow rates and enabling two zone control.

KEY FEATURES

- Control box included
- Industry leading reheat times
- Fully pre-plumbed and pre-wired

THE PRE-PLUMBED CYLINDER

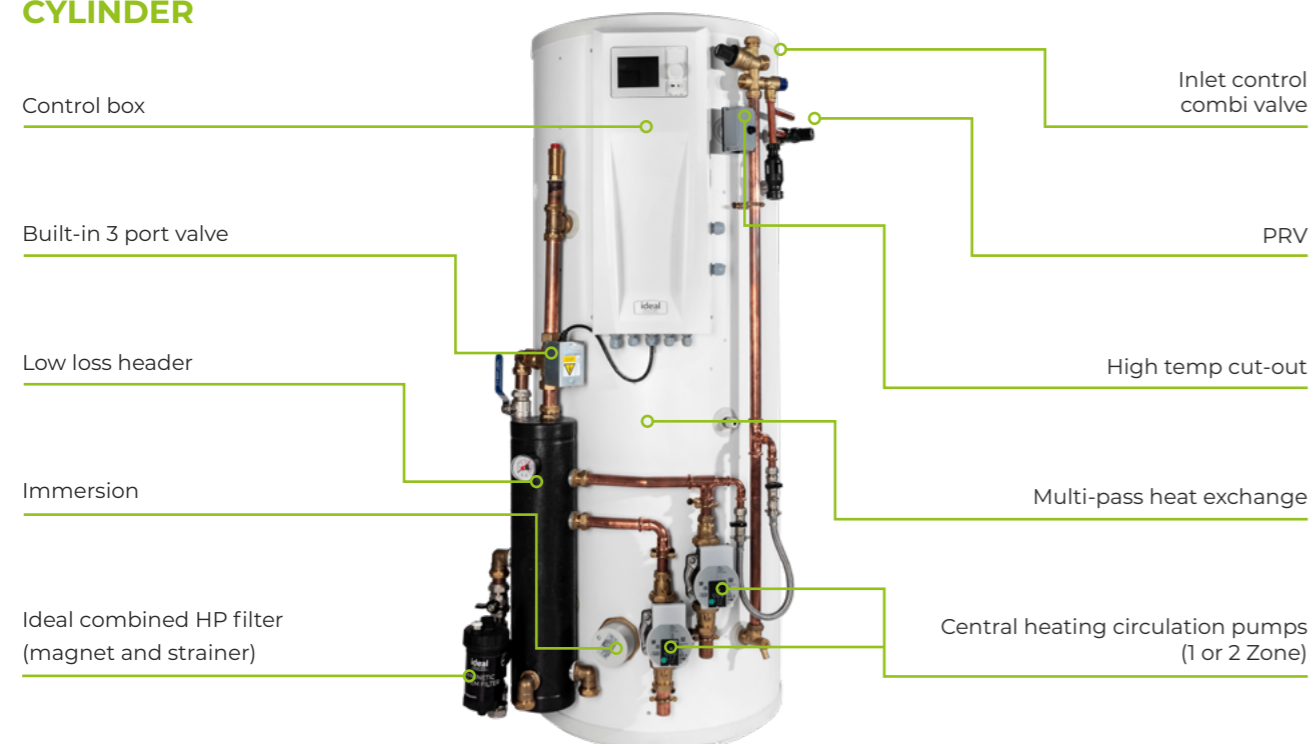

*Performance figures from for HWA 002:2020 heat pump test results



Single zone pre-plumbed cylinder specification

SINGLE ZONE PRE-PLUMBED CYLINDERS


		DHW CYL PP 150 CBOX 1Z SL	DHW CYL PP 180 CBOX 1Z SL	DHW CYL PP 150 CBOX 1Z	DHW CYL PP 180 CBOX 1Z
LOGIC AIR Cylinder code		236203	236204	236198	236199
HP290 Cylinder code		240127	240128	240122	240123
Energy Efficiency Class		B	C	B	B
Heat Loss	Watts/h	50	58	44	49
Capacity (DHW content)	Litres	145	169	148	170
Weight Empty	kg	46	53	44	48
Weight Full	kg	192	222	192	219
Overall Width	mm	581	581	636	636
Overall Height	mm	1598	1870	1196	1384
Overall Depth	mm	606	606	683	683
Cylinder Diameter	mm	475	475	550	550
Cylinder Height	mm	1519	1791	1118	1306
Primary heat exchanger surface area	m ²	1.8	3.0	1.6	2.5
Heat up time from 10°C to 50°C*	min	22.26	21.81	22.56	22.56
Immersion Heater rating	kW	3	3	3	3

*Heat Up Time, HWA Heat Pump Test 002:2020 (flow rate 0.42l/s and flow temperature of 55°C)

INCLUDES

- ✓ Control Box
- ✓ High temp cut out
- ✓ Isolation valves
- ✓ Circulation pumps
- ✓ DHW thermistor
- ✓ DHW 3-port valve
- ✓ Heat pump filter
- ✓ P&T valve
- ✓ Expansion vessel
- ✓ Automatic air vents
- ✓ 3kW immersion
- ✓ Flow and return thermistors
- ✓ Outdoor Sensor

Single zone pre-plumbed cylinder

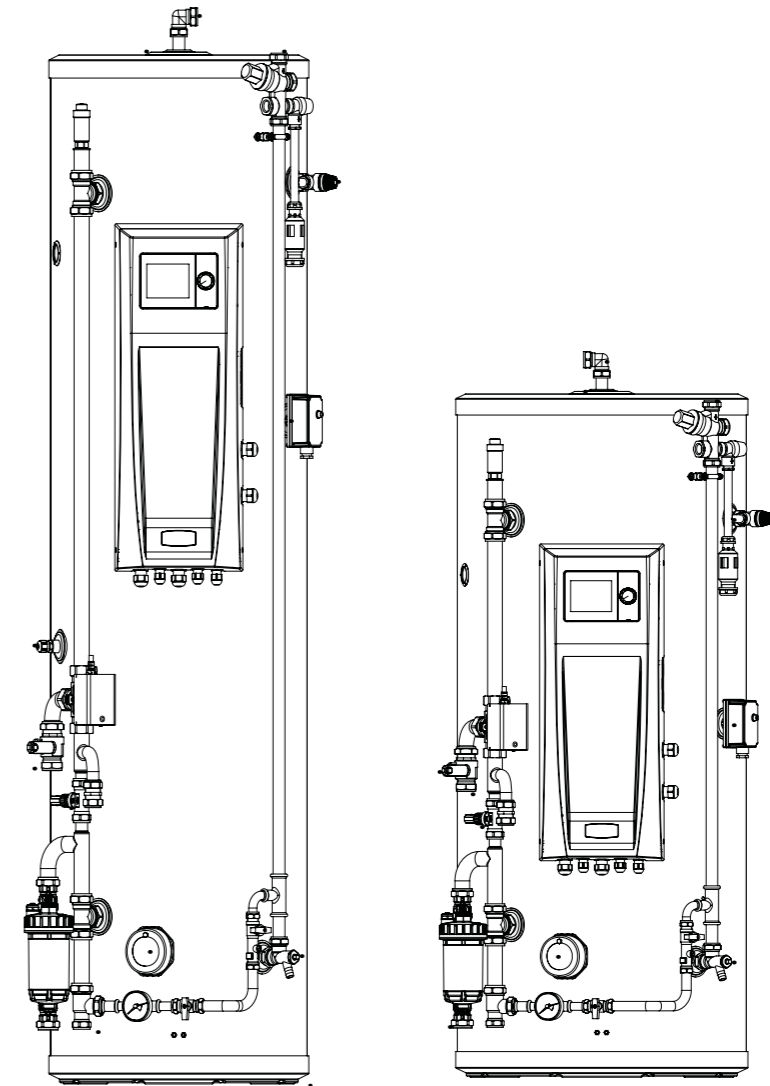

Two zone pre-plumbed cylinder specification

TWO ZONE PRE-PLUMBED CYLINDERS WITH LOW LOSS HEADER


		DHW CYL PP 210 CBOX LL 2Z SL	DHW CYL PP 210 CBOX LL 2Z	DHW CYL PP 250 CBOX LL 2Z	DHW CYL PP 300 CBOX LL 2Z
LOGIC AIR Cylinder code		236205	236200	236201	236202
HP290 Cylinder code		240129	240124	240125	240126
Energy efficiency class		C	B	C	C
Heat loss	Watts/h	65	55	63	72
Capacity (DHW content)	Litres	188	199	237	279
Weight empty	kg	60.6	64	69.8	73.4
Weight full	kg	248.9	262.8	307	352.4
Overall width	mm	647	704	704	704
Overall height	mm	2042	1572	1822	2068
Overall depth	mm	620	686	686	686
Cylinder diameter	mm	475	550	550	550
Primary heat exchanger surface area	m ²	2.5	2.5	3.0	3.0
Secondary return connection		yes	yes	yes	Yes
Immersion heater rating	kW	3	3	3	3
Heat up time from 10°C to 50°C*	min	23.68	30.60	27.34	35.05

*Heat Up Time, HWA Heat Pump Test 002:2020 (flow rate 0.42l/s and flow temperature of 55°C)

INCLUDES

- ✓ Control Box
- ✓ Controller and built-in low loss header
- ✓ High temp cut out
- ✓ Pressure gauge
- ✓ Isolation valves
- ✓ Circulation pumps
- ✓ DHW thermistor
- ✓ DHW 3-port valve
- ✓ Heat pump filter
- ✓ P&T valve
- ✓ Expansion vessel
- ✓ Automatic air vents
- ✓ 3kW immersion
- ✓ Flow and return thermistors
- ✓ Outdoor sensors

Two zone pre-plumbed cylinder

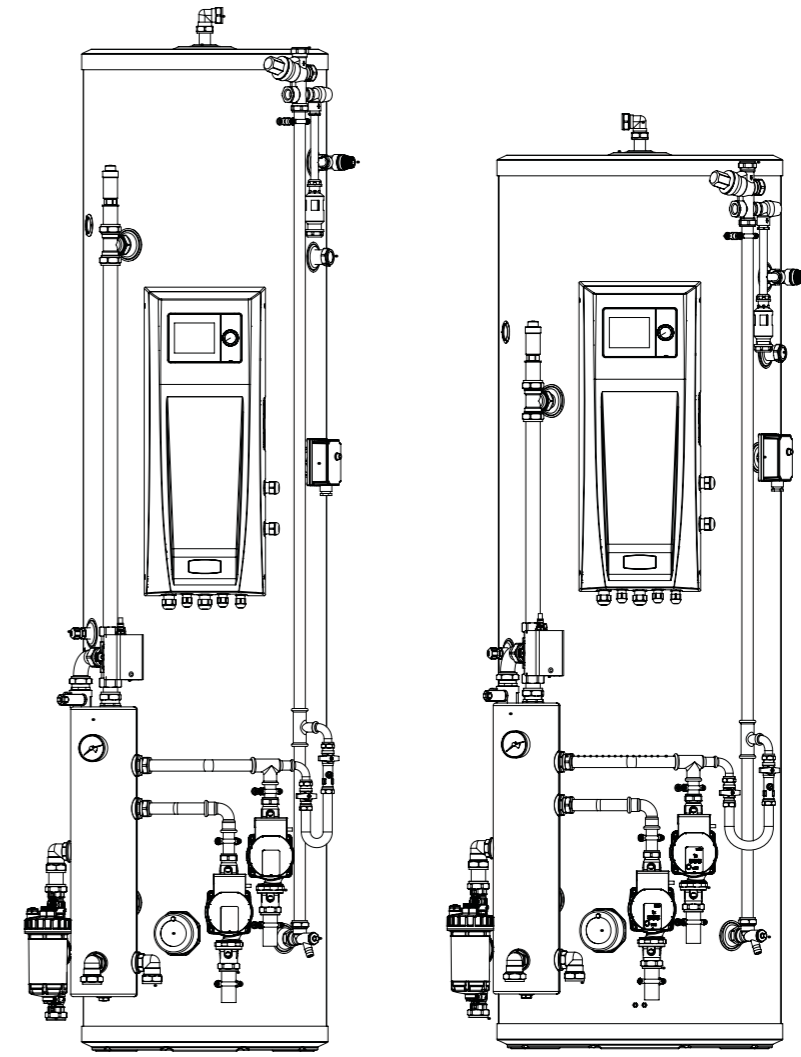


Pre-plumbed DHW cylinders with **integrated buffer** single zone specification

PRE-PLUMBED DHW CYLINDER WITH INTEGRATED BUFFER - SINGLE ZONE

		DHW CYL PP 180 CBOX BUFF 1Z	DHW CYL PP 210 CBOX BUFF 1Z	DHW CYL PP 250 CBOX BUFF 1Z	DHW CYL PP 300 CBOX BUFF 1Z
LOGIC AIR Cylinder code		236206	236208	236210	236212
HP290 Cylinder code		240130	240132	240134	240136
Energy efficiency class		B	B	B	B
Heat Loss	Watts/h	49	55	62	68
Capacity (DHW content)	Litres	171	199	239	287
Volume of integrated buffer	Litres	70	70	63.5	63.5
Weight empty	Kg	64.6	68.6	77	87
Weight full	Kg	305.6	337.4	379	437.5
Overall width	mm	644	644	705	705
Overall height	mm	1907	2095	1908	2128
Overall depth	mm	702	702	780	780
Cylinder diameter	mm	550	550	630	630
Cylinder height	mm	1829	2017	1829	2049
Primary heat exchanger surface area	m ²	2.5	2.5	2.5	3.0
Heat up time from 10°C to 50°C*	Min	22.17	32.71	26.56	44.09
Immersion heater rating	kW	3	3	3	3
Secondary return connection	No/Yes	No	Yes	Yes	Yes

*Heat Up Time, HWA Heat Pump Test 002:2020 (flow rate 0.42l/s and flow temperature of 55°C).

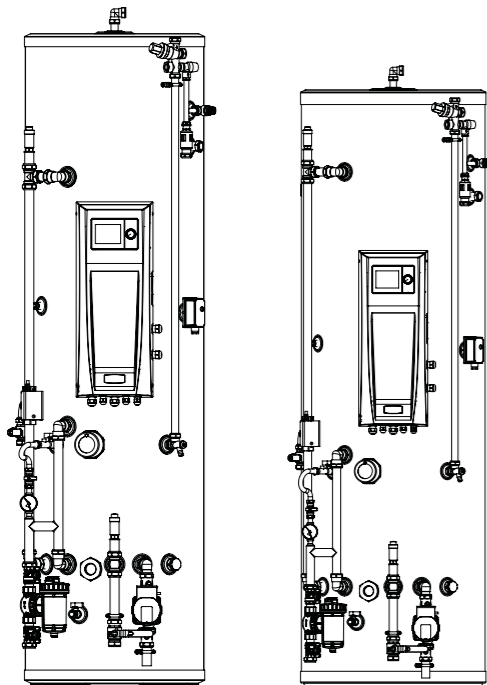

INCLUDES


- ✓ Wiring Centre
- ✓ Controller and built-in buffer tank
- ✓ High temp cut out
- ✓ Pressure gauge
- ✓ Isolation valves
- ✓ DHW 3-port valve
- ✓ Heat pump filter
- ✓ P&T valve
- ✓ Expansion vessel
- ✓ Automatic air vents
- ✓ 3kW immersion
- ✓ Flow and return thermistors
- ✓ Outdoor sensors

Pre-plumbed DHW cylinders with **integrated buffer** two zone specification

PRE-PLUMBED DHW CYLINDER WITH INTEGRATED BUFFER - TWO ZONE

		DHW CYL PP 180 CBOX BUFF 2Z	DHW CYL PP 210 CBOX BUFF 2Z	DHW CYL PP 250 CBOX BUFF 2Z	DHW CYL PP 300 CBOX BUFF 2Z
LOGIC AIR Cylinder code		236207	236209	236211	236213
HP290 Cylinder code		240131	240133	240135	240137
Energy efficiency class		B	B	B	B
Heat Loss	Watts/h	49	55	62	68
Capacity (DHW content)	Litres	171	199	239	286
Volume of integrated buffer	Litres	70	70	63.5	63.5
Weight empty	Kg	68	71.8	80	90.2
Weight full	Kg	309	340.6	382	439.7
Overall width	mm	644	644	705	705
Overall height	mm	1907	2095	1908	2128
Overall depth	mm	702	702	780	780
Cylinder diameter	mm	550	550	630	630
Cylinder height	mm	1829	2017	1829	2049
Primary heat exchanger surface area	m ²	2.5	2.5	2.5	3.0
Heat up time from 10°C to 50°C*	Min	22.17	32.71	26.56	44.09
Immersion heater rating	kW	3	3	3	3
Secondary return connection	No/Yes	No	Yes	Yes	Yes

*Heat Up Time, HWA Heat Pump Test 002:2020 (flow rate 0.42l/s and flow temperature of 55°C).

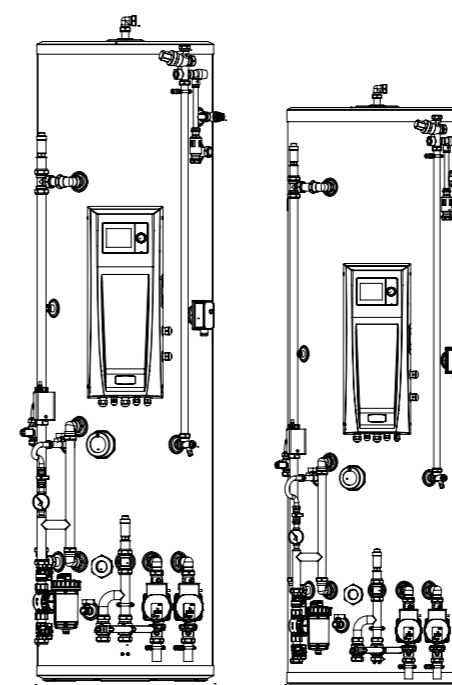

INCLUDES

- ✓ Wiring Centre
- ✓ Controller and built in buffer tank
- ✓ High temp cut out
- ✓ Pressure gauge
- ✓ Isolation valves
- ✓ Circulation pumps
- ✓ DHW thermistor
- ✓ DHW 3-port valve
- ✓ Heat pump filter
- ✓ Expansion vessel
- ✓ Automatic air vents
- ✓ 3kW immersion
- ✓ Outdoor sensors

Logic Air control box



The Logic Air control box is the central hub for the heat pump system, linking the heat pump to your heating and hot water cylinder. It enables in depth control, scheduling, connectivity and performance diagnostics.

INBUILT HEAT PUMP CONTROLLER

Our inbuilt controller uses tried and tested technology to keep you warm efficiently. From scheduling to diagnostics our controller gives you control and transparency.

QUICK START SET UP

Our quick start menu makes commissioning fast, easy and accurate. In just a few steps the heat pump can be up and running and tuned to its most efficient parameters.

HYBRID READY

For installations that require a heat pump and a boiler, the Logic Air control box brings a boiler and heat pump together seamlessly.

CONNECTIVITY

The Logic Air control box is compatible with Halo Air, Link Cellular heat pump diagnostics and 3rd party thermostats, giving you access to online control, scheduling and remote diagnostics from anywhere in the world.

SMART GRID COMPATIBLE / SOLAR PV COMPATIBLE


The Logic Air control box is smart grid ready and can connect to solar PV, enabling smarter ways of powering heating and hot water.

PERFORMANCE DIAGNOSTICS

The Logic Air control box gives you access to the efficiency of the householders heating system, helping them to understand the health of their heat pump system at a glance.



Control box		Ideal Product Code: 235797	
Physical properties			
Weight	kg	5	
Height	mm	627	
Width	mm	254	
Depth	mm	147	
Electrical properties			
IP rating	IP	20	
Rated voltage	VAC	220-240	
Maximum rated current (control box)	A	1	
Maximum rated current (contactor)	A	16	
Rated power input (control box)	W	100	
Rated power input (contactor)	W	3000	

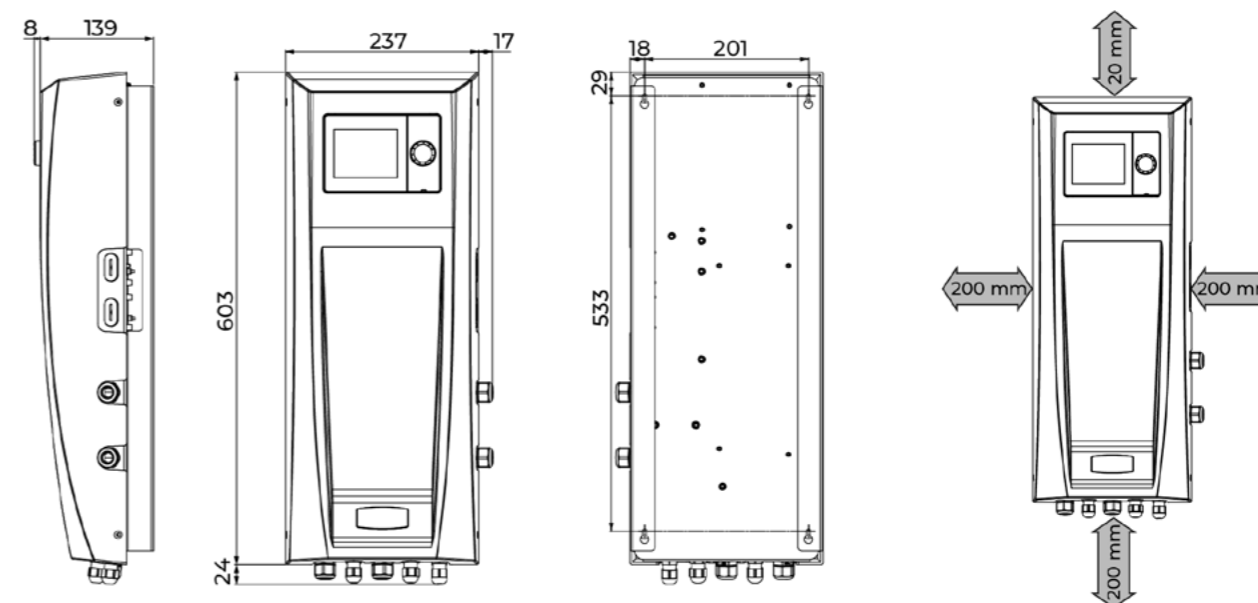

HP290 control box



The HP290 control box is a hub for a HP290 heat pump system. By bringing all electrical connections to one central location, the HP290 control box enables a fast and simple installation experience.

DESIGNED FOR HP290

Designed by Ideal Heating, the HP290 control box offers heat pump installers a quick and simple installation.

HYBRID AND CASCADE READY

For more complex installations, the HP290 control box can seamlessly bring the HP290 heat pump together with either a boiler in hybrid mode or another HP290 in cascade installations.


FLEXIBLE

The HP290 control box gives the HP290 the ability to work with all types of UK heating systems, from traditional radiators to underfloor heating, with the ability to control more than one heating zone.

PERFORMANCE MONITORING

With the HP290 control box, end users can see how their heat pump system is performing on a daily, weekly and annual basis, giving them piece of mind that their heat pump is working as it should be.

Control box		Ideal Product Code: 239386	
Physical properties			
Weight	kg	5	
Height	mm	627	
Width	mm	254	
Depth	mm	147	
Electrical properties			
IP rating	IP	20	
Rated voltage	VAC	220-240	
Maximum rated current (control box)	A	1	
Maximum rated current (contactor)	A	16	
Rated power input (control box)	W	100	
Rated power input (contactor)	W	3000	

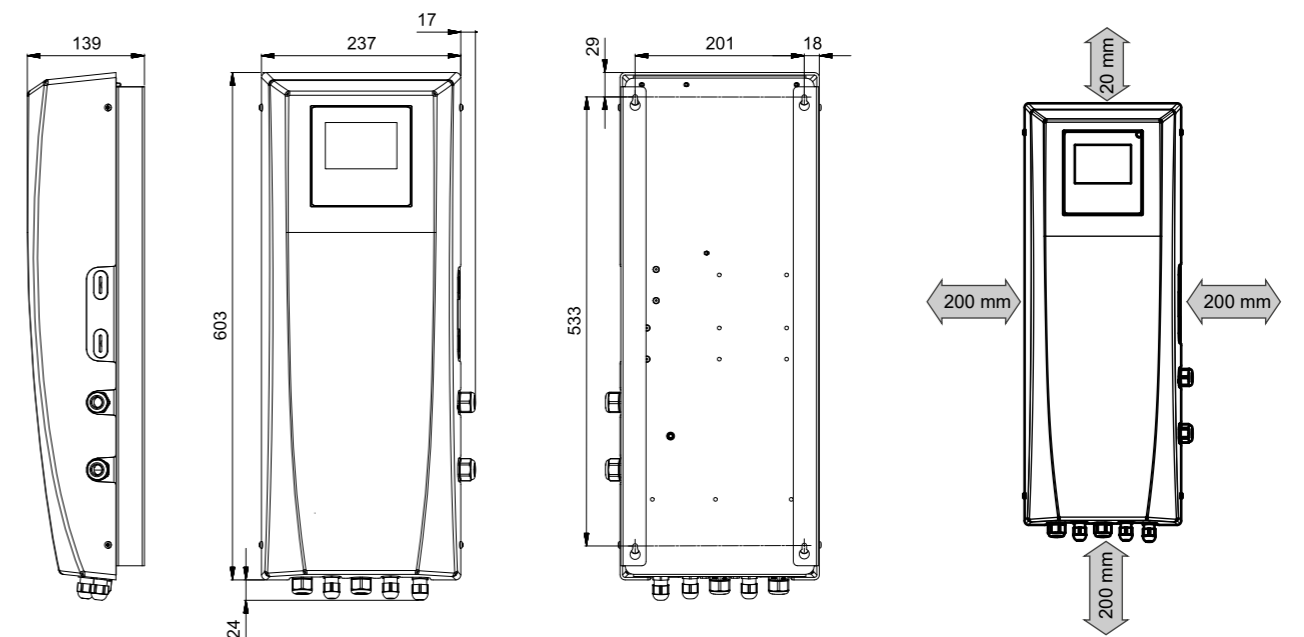

Accessories list



COMPATIBLE WITH
Logic Air
& HP290

FLEXIBLE HOSE

Product Code: FF-500-28-F

Flexible Hose 500mm

- 28mm -1" Female connections pair (2x hose)
- Pre-insulated (19mm PVC)
- Stainless steel

Product Code: FH-750-28-F

Flexible Hose 750mm

- 28mm -1" Female connectionsPair (2x hose)
- Pre-insulated (19mm PVC)
- Stainless steel



COMPATIBLE WITH
Logic Air
& HP290

BUFFER TANK

Ideal Product Code: AH700436

25L Buffer Tank

- 1" and 1 1/4" connections
- 6 bar max. pressure

Ideal Product Code: AH700437

50L Buffer Tank

- 1" and 1 1/4" connections
- 6 bar max. pressure

ADDITIONAL ACCESSORIES:



COMPATIBLE WITH
Logic Air
& HP290

FILTER BALL VALVE

Ideal Product Code:
236738

- 1" connections
- 30 bar max. pressure
- Brass – chrome plated body
- Stainless steel & Nylon filter



COMPATIBLE WITH
Logic Air
& HP290

Y STRAINER

Ideal Product Code:
236740

- 1" connections
- 16 bar max. pressure
- Brass body
- Stainless steel strainer



COMPATIBLE WITH
Logic Air
& HP290

MAGNETIC FILTER

Ideal Product Code:
236911

- 28mm connections
- 4 bar max. working pressure



COMPATIBLE WITH
HP290

HP290 CONTROLLER

Ideal Product Code:
241519

- Standalone controller for HP290
- HP290 only

COMPATIBLE WITH
HP290

HP290 HYBRID KIT

Ideal Product Code:
240932

- Kit for HP290 installations with a boiler
- HP290 only

COMPATIBLE WITH
HP290

HP290 2-ZONE KIT

Ideal Product Code:
241520

- Kit for 2-zone HP290 installations (HP290 only)
- Required when not using pre-plumbed cylinder

ACCESSORIES FOR OUTDOOR UNIT.



COMPATIBLE WITH
Logic Air

ANTI-VIBRATION RUBBER MOUNTING FEET

Product Code:
11105064V

- Rubber feet
- Pair (x2)
- 600mm



COMPATIBLE WITH
HP290

HP290 ANTI-VIBRATION RUBBER MOUNTING FEET

Ideal Product Code:
240903

- For HP290 only
- 3 pack
- 600mm



COMPATIBLE WITH
Logic Air
& HP290

ANTI-FREEZE VALVE

Product Code:
ZERO001

- 1" Connections
- 10 Bar Max Inlet Pressure
- Sensitivity: +/-1°C
- Opening Temp: 3°C
- Closing Temp: 4°C



COMPATIBLE WITH
Logic Air

LINK DIAGNOSTICS CELLULAR HEAT PUMP

Ideal Product Code: 235545

- Remote Diagnostics
- Online Dashboard
- Designed for Logic Air
- 10 year data plan included
- Only available for Logic Air

*The product images shown are for illustration purposes only and may not be an exact representation of the product

HALO

AIR

IDEAL HALO AIR RF & Wi-Fi



KEY FEATURES




Designed for
Logic Air



Easy to install



Full heating and
hot water control

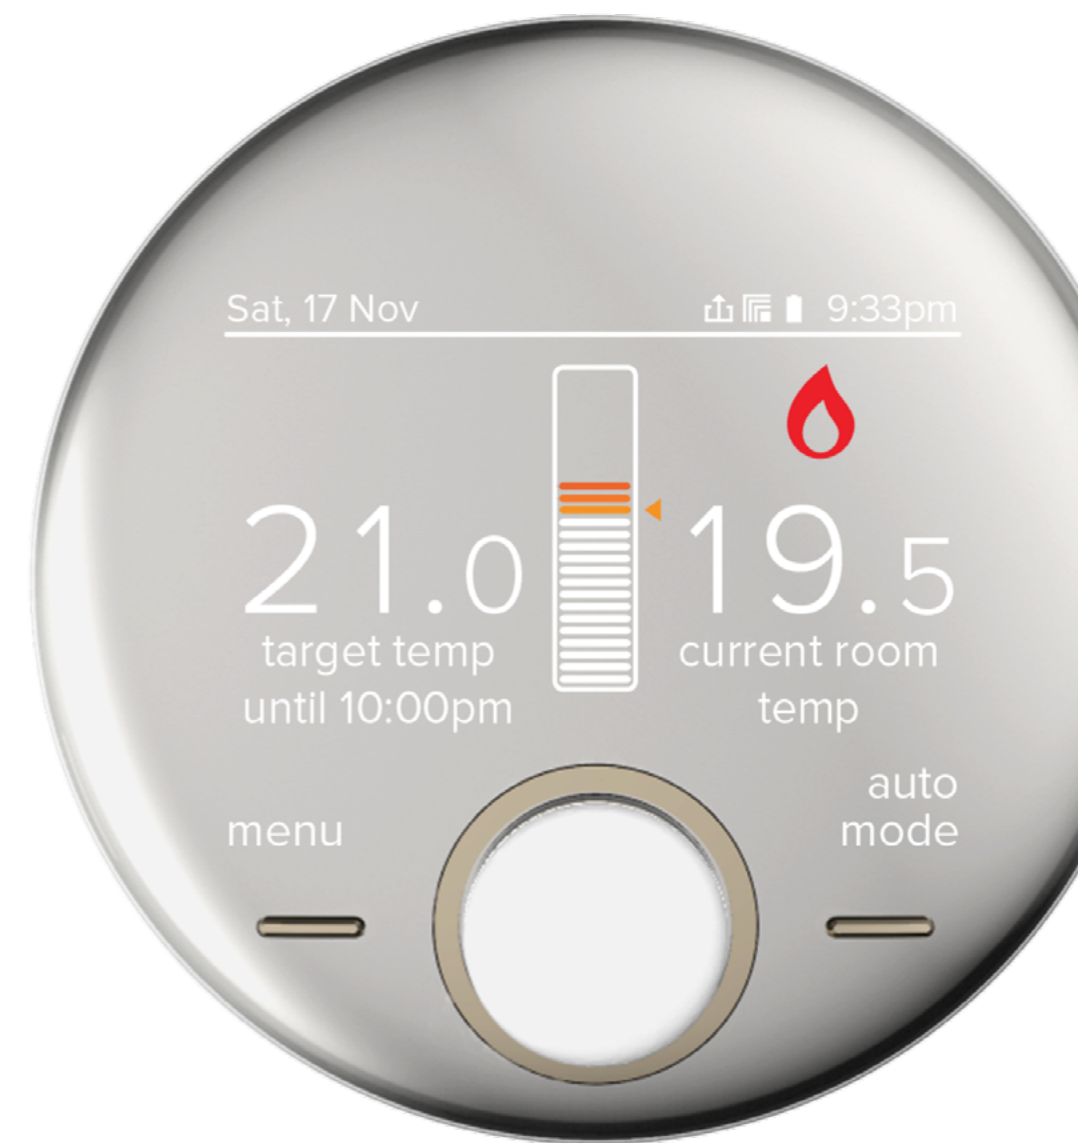

*2 year parts and labour warranty available when registered within 30 days of installation. Terms and conditions apply.

Halo Air introduction

COMPATIBLE
WITH
Logic Air

Halo Air is a programmable room thermostat, based on the current Ideal Halo platform that is designed and developed to work seamlessly with the Logic Air monobloc heat pump.

As the primary interface with the end user for the whole heating system it is important that the room thermostat is clear, easy to use and guides the right usage behaviour.

Halo Air not only provides a clear user interface for the householder but it helps to communicate diagnostic data to the installer or service help desk.

HALO AIR RF



HALO AIR Wi-Fi



HALO AIR 2 ZONE RF



HALO AIR 2 ZONE Wi-Fi



Halo Air RF



COMPATIBLE WITH
Logic Air



2 Year warranty

Easily adjustable schedule to fit with any lifestyle

Designed to work with the Logic Air heat pump

Maintain heat pump health with on screen service and fault notifications

Easy to install; simple wiring to the heat pump control box

Year-round customer support

Halo Air RF is a wireless programmable room thermostat designed to work with Logic Air.

Halo Air offers fast, flexible and intelligent wireless technology and is packed with features that enable simple and easy heating and hot water control.

It's compact, contemporary design and large, clear, colour screen allows you to maintain heat pump health with on screen service and fault notifications.

Ideal product code	234819
Power source	4 x AA alkaline batteries or USB
Wireless communication protocol	Zigbee 3.0
Heat pump communication protocol	BSB
Install location	Wall mounted or desk mounted
Desk stand supplied	YES
ERP Class	Class VI
TTZC (Time, Temperature and Zone control)	YES - Time and Temperature control
WEEE	Yes - options available
Certification	UKCA CE

*2 year parts and labour warranty available when registered within 30 days of installation. Terms and conditions apply.

Halo Air Wi-Fi



COMPATIBLE WITH
Logic Air



2 Year warranty

Easy to install; simple wiring to the heat pump control box

Control heating and hot water anywhere via the app

Designed to work with the Logic Air heat pump

Easily adjustable schedule to fit with any lifestyle

Smart home compatible – control heating with Amazon Alexa or Google Home*

Wi-Fi allows smart home compatibility

Easy app set up walkthrough to get started

Year-round customer support

Halo Air Wi-Fi is designed to work with Logic Air heat pumps and allows flexible control of heating and hot water with the intuitive Halo app, which can be connected through smart home devices like Amazon Alexa and Google Home.

It's simple to install, straightforward for everyone to use, no matter where they are.

Ideal product code	234790
Power source	4 x AA alkaline batteries or USB
Wireless communication protocol	Zigbee 3.0
Heat pump communication protocol	BSB
Install location	Wall mounted or desk mounted
Desk stand supplied	YES
ERP Class	Class VI
TTZC (Time, Temperature and Zone control)	YES - Time and Temperature control
WEEE	Yes - options available
Certification	UKCA CE

*2 year parts and labour warranty available when registered within 30 days of installation. Terms and conditions apply.

Halo Air 2-Zone RF



COMPATIBLE WITH
Logic Air



2-year warranty



Designed to work with the Logic Air heat pump



2nd space heating zone control



Easy to install: simple wiring to the heat pump control box



Easily adjustable schedule to fit with your lifestyle



Year-round customer support

Halo Air RF is a wireless programmable room thermostat designed to work with Logic Air.

Halo Air 2-Zone RF incorporates an additional programmable room thermostat with the extra functionality of controlling the temperature of a second zone.

Ideal product code	234791
Power source	8 x AA alkaline batteries or USB
Wireless communication protocol	Zigbee 3.0
Heat pump communication protocol	BSB
Install location	Wall mounted or desk mounted
Desk stand supplied	YES
ERP Class	Class VI
TTZC (Time, Temperature and Zone control)	YES - Time, temperature and Zonal control
WEEE	Yes - options available
Certification	UKCA CE

*2 year parts and labour warranty available when registered within 30 days of installation. Terms and conditions apply.

Halo Air 2-Zone Wi-Fi



COMPATIBLE WITH
Logic Air



2-year warranty



Wi-Fi allows smart home compatibility



Control heating and hot water anywhere via the app



Designed to work with the Logic Air heat pump



Easy to install: simple wiring to the heat pump control box



Smart home compatible – control heating with Amazon Alexa or Google Home*



2nd space heating zone control



Easy app set up walkthrough to get started



Year-round customer support

Halo Air Wi-Fi is designed to work with Logic Air heat pumps and allows flexible control of heating and hot water with the intuitive Halo app, which can be connected through smart home devices like Amazon Alexa and Google Home.


Halo Air 2-Zone Wi-Fi incorporates an additional programmable room thermostat with the extra functionality of controlling the temperature of a second zone.

Ideal product code	234792
Power source	8 x AA alkaline batteries or USB
Wireless communication protocol	Zigbee 3.0
Heat pump communication protocol	BSB
Install location	Wall mounted or desk mounted
Desk stand supplied	YES
ERP Class	Class VI
TTZC (Time, Temperature and Zone control)	YES - Time, temperature and Zonal control
WEEE	Yes - options available
Certification	UKCA CE

*2 year parts and labour warranty available when registered within 30 days of installation. Terms and conditions apply.


Halo Air features

HALO AIR IS A BATTERY POWERED, WIRELESS CONTROL FOR BOTH HEATING AND HOT WATER

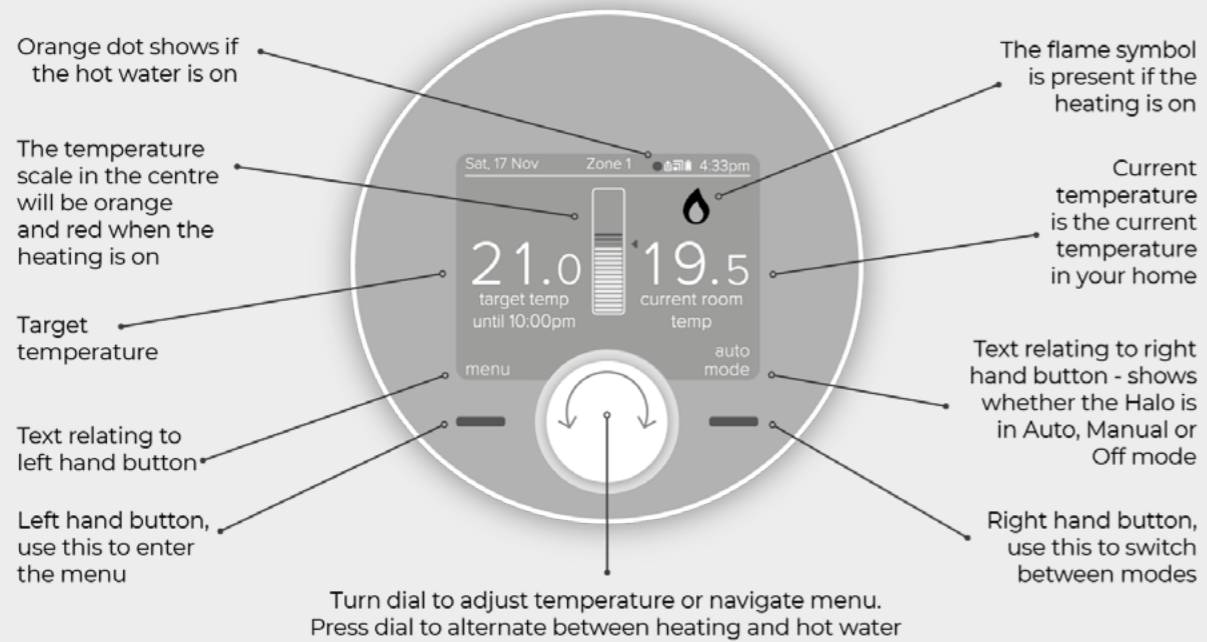

HALO AIR SMART INTERFACE

The Halo Air smart interface connects the heat pump to the Wi-Fi and the Halo thermostat(s)

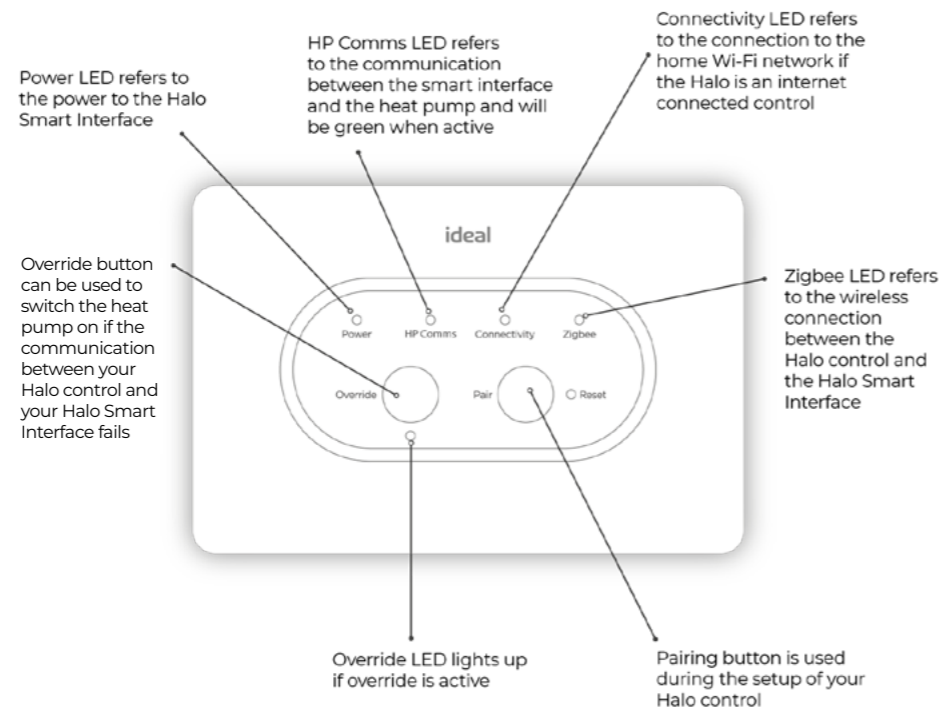

Halo Lite RF

COMPATIBLE WITH HP290.

2 YEAR WARRANTY*



- Compatible with HP290 heat pump
- Easy to install; simple wiring to the heat pump control box
- Easily adjustable schedule to fit with any lifestyle
- Year-round customer support

Halo Lite RF offers users an aesthetically pleasing room thermostat with the signature Halo experience that integrates perfectly with your customer's HP290 heat pump system.

Ideal product code	237423
Power source	4x AA batteries (PRT), 240V (receiver)
Install location	Wall mounted or desk mounted
Desk stand supplied	YES
Heat pump control	One/off control - cycle time 1 hour

Ideal Heat Pump and Halo Air product codes

Ideal Product Code	Description
Logic Air monobloc heat pumps	
IE750664	Logic Air monobloc 4kW R32
IE750665	Logic Air monobloc 5kW R32
IE750666	Logic Air monobloc 8kW R32
IE750667	Logic Air monobloc 10kW R32
HP290 monobloc heat pumps	
241486	HP290 4.5kW R290
241487	HP290 6kW R290
241488	HP290 8kW R290
241489	HP290 10kW R290
241490	HP290 12kW R290
241491	HP290 14kW R290
Halo programmable room thermostats	
234819	Halo Air single zone RF (compatible with Logic Air)
234790	Halo Air single zone Wi-Fi (compatible with Logic Air)
234791	Halo Air 2-zone RF (compatible with Logic Air)
234792	Halo Air 2-zone Wi-Fi (compatible with Logic Air)
237423	Halo Lite RF (compatible with HP290)
Logic Air Pre-plumbed DHW cylinder with control box and integrated buffer tank	
236206	Logic Air DHW pre-plumbed cylinder 180L, control box & buffer 1-zone
236207	Logic Air DHW pre-plumbed cylinder 180L, control box & buffer 2-zone
236208	Logic Air DHW pre-plumbed cylinder 210L, control box & buffer 1-zone
236209	Logic Air DHW pre-plumbed cylinder 210L, control box & buffer 2-zone
236210	Logic Air DHW pre-plumbed cylinder 250L, control box & buffer 1-zone
236211	Logic Air DHW pre-plumbed cylinder 250L, control box & buffer 2-zone
236212	Logic Air DHW pre-plumbed cylinder 300L, control box & buffer 1-zone
236213	Logic Air DHW pre-plumbed cylinder 300L, control box & buffer 2-zone
HP290 Pre-plumbed DHW cylinder with control box and integrated buffer tank	
240130	HP290 DHW pre-plumbed cylinder 180L, control box & buffer 1-zone
240131	HP290 DHW pre-plumbed cylinder 180L, control box & buffer 2-zone
240132	HP290 DHW pre-plumbed cylinder 210L, control box & buffer 1-zone
240133	HP290 DHW pre-plumbed cylinder 210L, control box & buffer 2-zone
240134	HP290 DHW pre-plumbed cylinder 250L, control box & buffer 1-zone
240135	HP290 DHW pre-plumbed cylinder 250L, control box & buffer 2-zone
240136	HP290 DHW pre-plumbed cylinder 300L, control box & buffer 1-zone
240137	HP290 DHW pre-plumbed cylinder 300L, control box & buffer 2-zone

Ideal Product Code	Description
Logic Air Pre-plumbed DHW cylinders with control box	
236198	Logic Air DHW pre-plumbed cylinder 150L & control box 1-zone
236199	Logic Air DHW pre-plumbed cylinder 180L & control box 1-zone
236200	Logic Air DHW pre-plumbed cylinder 210L, control box & low loss header 2-zone
236201	Logic Air DHW pre-plumbed cylinder 250L, control box & low loss header 2-zone
236202	Logic Air DHW pre-plumbed cylinder 300L, control box & low loss header 2-zone
236203	Logic Air DHW pre-plumbed slimline cylinder 150L & control box 1-zone
236204	Logic Air DHW pre-plumbed slimline cylinder 180L & control box 1-zone
236205	Logic Air DHW pre-plumbed slimline cylinder 210L, control box & low loss header 2-zone
HP290 Pre-plumbed DHW cylinders with control box	
240122	HP290 DHW pre-plumbed cylinder 150L & control box 1-zone
240123	HP290 DHW pre-plumbed cylinder 180L & control box 1-zone
240124	HP290 DHW pre-plumbed cylinder 210L, control box & low loss header 2-zone
240125	HP290 DHW pre-plumbed cylinder 250L, control box & low loss header 2-zone
240126	HP290 DHW pre-plumbed cylinder 300L, control box & low loss header 2-zone
240127	HP290 DHW pre-plumbed slimline cylinder 150L & control box 1-zone
240128	HP290 DHW pre-plumbed slimline cylinder 180L & control box 1-zone
240129	HP290 DHW pre-plumbed slimline cylinder 210L, control box & low loss header 2-zone
Non pre-plumbed DHW heat pump cylinders	
219433	Heat pump cylinder 180L
219437	Heat pump cylinder 180L slimline
219434	Heat pump cylinder 210L
219438	Heat pump cylinder 210L slimline
219435	Heat pump cylinder 250L
219436	Heat pump cylinder 300L
Standalone controls	
235797	Logic Air control box
239386	HP290 control box
Buffer tanks	
AH700436	Buffer tank 25L
AH700437	Buffer tank 50L
Accessories	
11105064V	Logic Air Rubber floor standing feet 600mm (x2)
240903	HP290 Rubber floor standing feet 600mm (x3)
FF-500-28-F	Flexible hose 500mm
FH-750-28-F	Flexible hose 750mm
236738	Filter ball valve
236740	Y strainer
236911	Logic Air magnetic system filter
235545	Logic Air Link Diagnostics Cellular Heat Pump
240932	HP290 Hybrid kit
241520	HP290 2-zone kit
241519	HP290 Standalone controller



Designed for new builds



MONOBLOC TECHNOLOGY

- Modern contemporary chassis design
- Quiet acoustics
- Easy to install and service
- Simple to commission
- Compatible with Halo Air



DHW PERFORMANCE MATTERS

- Designed to work with Logic Air pre-plumbed cylinders
- Highly efficient hot water production
- Fast reheat times for reduced energy usage
- Low pressure losses ensure good heat pump modulation



GOING GREEN WITHOUT COMPROMISE

- Built to be efficient with an A+++ ErP rating
- Capacities to work in the Irish climate
- Low global warming potential refrigerant
- Integrates with solar PV and smart grid technologies

Designed for home owners



USER FRIENDLY

- Simple user controls
- Low running costs
- Easy maintenance and installation
- Engineered for reliability



INDUSTRY LEADING CUSTOMER SERVICE

- In-house heat pump design team
- Nationwide service engineers
- Irish customer service contact centre
- Online warranty registration with Connect



CUTTING EDGE TECHNOLOGY

- Auto Adapt - Autopilot for your heating
- Engineered for reliability
- Remarkably quiet



Designed for installers



QUICK INSTALLATION

- Small and compact
- Low clearances
- Simple to install
- Pre-plumbed and pre-wired heat pump cylinder



EASY SERVICING AND MAINTENANCE

- Remote system health checks
- Factory fitted magnetic and particle filter
- All service components to one side of the heat pump
- All hydraulic servicing can be done inside the property



WORLD-CLASS SUPPORT

- Dedicated heat pump engineers covering every corner of Ireland
- First install assisted commissioning
- Full parts and labour warranty
- Irish customer service contact centre

Benefits of working with Ideal



At Ideal Heating we understand the importance of quality customer care and post sales support, which is why we have invested £4 million in our services to support you.

To ensure we are always achieving highest standards of customer service, all our customers are offered the opportunity to provide feedback on their interactions with us.



Delivering industry leading customer support is our promise to you, which is why our Ireland based contact centre is open 5 days a week.



If your query cannot be resolved over the phone, we have a team of service engineers all over Ireland to ensure we provide a rapid response typically the same or next day.

World-class support

Best-in-class heat pump engineer support

- Nationwide customer service engineers
- Dedicated expert heat pump engineers to ensure you have the support you need
- On hand to provide one-to-one advice on the road, over the phone or online
- You're fully supported, wherever and whenever you need

Products designed to work together

- Taking all the experience we have across the globe and throughout Europe to deliver heat pump technology that works and provides optimum comfort and efficiency
- The Ideal heat pump package combines three revolutionary products: Our quiet, compact and highly efficient monobloc heat pump, our industry leading pre-plumbed heat pump cylinder and the Halo Air heat pump thermostat
- Ensuring a fit for purpose heating system

Dedicated heat pump customer service

- Over £4 million investment into our services to support you
- Our highly trained customer service have expertise across the full product range
- Irish customer service contact centre
- Delivering industry leading customer support

Remote system health checks

- Simple and quick heat pump health checks
- Quick and easy no call out remote system resets
- Smart support for peace of mind

* System needs to be connected through Halo Air WiFi or Link Cellular for remote system health checks.



info@idealenergy.ie | 01-9617700
Ideal Energy Distribution,
Green Technology Campus, Kinsealy Lane,
Malahide, Co.Dublin K36 HH42

idealenergy.ie

The information in this brochure was correct at the time of going to print. Ideal Heating reserve the right to make any modifications to product specifications or any other details, without prior notification. For further clarification, please enquire in writing to the head office address above.

Logic Air Ireland Sales Brochure **Rev B**

